OIPE JUN 1 1 2001 PATENT & TRADEMARK OFFICE

TRANSMITTAL LETTER			Docket Number 67097-001
Application Number 09/803,191	Filing Date 9 March 2001	Examiner	Group Art Unit 3672
Invention Title *ADI Centralizer*			

#3

To the Assistant Commissioner for Patents, Box Missing Parts:

Transmitted herewith for filing in the patent application of **Ian Alastair Kirk, William Barron, Alistair Bertram Clark, Arron Rimmer and Barry Newton** are:

[X] submission of missing parts and notice of missing parts formalities letter - part 2

[X] executed declaration and power of attorney of the inventors

[X] assignment of the invention to Downhole Products PLC and recordation Form PTO-1595

[X] a certified copy of United Kingdom application 0005740.6 filed 10 March 2000

[X] other: **return receipt postcard**

[X] A check in the amount of **$65** to cover the missing parts filing fee is enclosed.

[X] A check in the amount of **$40** to cover the assignment recordation fee is enclosed.

[X] The Commissioner is hereby authorized to charge and credit **Deposit Account No. 08-3460** as described below. I have enclosed a duplicate copy of this sheet.

  [X] Credit any overpayment.

  [X] Charge any additional filing fees required.

Respectfully submitted,

Kevin M. Kercher

Kevin M. Kercher, Reg. No. 33,408
HUSCH & EPPENBERGER, LLC
401 Main Street, Suite 1400
Peoria, IL 61602-1241
309-637-4900

"Express mail" mailing label number: EF360361296US Date of Deposit: 11 June 2001

I hereby certify that this correspondence is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to Box Missing Parts, Assistant Commissioner for Patents, Washington, D.C. 20231.

Meridith L. Deverman

Meridith L. Deverman

::ODMA\PCDOCS\PEORIA\109628\1

#3
D.M.
8/16/01

JUN 1 1 2001
PATENT & TRADEMARK OFFICE

The Patent Office
PATENTS • DESIGNS • COPYRIGHT • TRADE MARKS

INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated 14TH May 2001

Patents Form 1/77

Patents Act 1977
(Rule 16)

THE PATENT OFFICE
A
10 MAR 2000
RECEIVED BY FAX

The Patent Office

10MAR00 E520152-1 D02884
P01/7700 0.00-0005740.6

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
Gwent NP9 1RH

1.	Your reference	P25625/JLU/CWA/JAL
2.	Patent application number *(The Patent Office will fill in this part)*	**0005740.6** 10 MAR 2000
3.	Full name, address and postcode of the or of each applicant *(underline all surnames)*	Downhole Products PLC Badentoy Road Badentoy Park Portlethen Aberdeen AB12 4YA
	Patents ADP number *(if you know it)*	7159171002
	If the applicant is a corporate body, give the country/state of its incorporation	United Kingdom
4.	Title of the invention	"Centraliser"
5.	Name of your agent *(if you have one)*	Murgitroyd & Company
	"Address for service" in the United Kingdom to which all correspondence should be sent *(including the postcode)*	373 Scotland Street GLASGOW G5 8QA
	Patents ADP number *(if you know it)*	1198013
6.	If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and *(if you know it)* the or each application number	Country / Priority application number *(if you know it)* / Date of filing *(day / month / year)*
7.	If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application / Date of filing *(day / month / year)*
8.	Is a statement of inventorship and of right to grant of a patent required in support of this request? *(Answer 'Yes' if: a) any applicant named in part 3 is not an inventor, or b) there is an inventor who is not named as an applicant, or c) any named applicant is a corporate body. See note (d))*	Yes

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form	–
Description	11
Claim(s)	–
Abstract	–
Drawing(s)	4

10. If you are also filing any of the following, state how many against each item.

Priority documents	–
Translations of priority documents	–
Statement of inventorship and right to grant of a patent *(Patents Form 7/77)*	–
Request for preliminary examination and search *(Patents Form 9/77)*	–
Request for substantive examination *(Patents Form 10/77)*	–
Any other documents *(please specify)*	–

11. I/We request the grant of a patent on the basis of this application.

Signature MURGITROYD & COMPANY Date 10/3/2000

12. Name and daytime telephone number of person to contact in the United Kingdom Jamie Allan 01224 706616

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

a) *If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.*

b) *Write your answers in capital letters using black ink or you may type them.*

c) *If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*

d) *If you have answered 'Yes' Patents Form 7/77 will need to be filed.*

e) *Once you have filled in the form you must remember to sign and date it.*

f) *For details of the fee and ways to pay please contact the Patent Office.*

"Centraliser"

This invention relates to a centraliser, and particularly to a centraliser for use in centralising casing or other tubulars such as drillpipe or screens in an oil or gas well.

In drilling wellbores for oil and gas it is common to drill through the formation and subsequently to case the open bore with a liner or a casing (typically of metal) and to cement the liner or casing in place. Centralisers are used around the liner or casing in order to keep it in the middle of the borehole and to allow free flow of cement through the annulus between the casing and the wall of the borehole. This acts as a sealant and also as a mechanical support for the casing. Centralisers have therefore been adapted for attachment around the outer diameter of a liner or casing prior to the cement job. Centralisers can also be used to keep a screen in a central location in the wellbore as it passes through a formation.

According to the present invention there is provided a centraliser comprising an annular body with a bore extending through the body and one or more blades, the centraliser being adapted to fit around a tubular to be centralised, and comprising a tempered metal.

The invention also provides a method of manufacturing a centraliser, the method comprising forming the centraliser from metal and tempering the metal centraliser.

The metal is preferably austenitised, typically by heating the metal to 800-960°C typically for 1 to 4 hours. Preferably the metal is also austempered by quenching in molten salt for 2-4 hours at 200-400°C and preferably air dried. Preferably the salt is a mixture of potassium nitrate and sodium nitrite. Typically an equimolar mixture of these salts is used. Typically the entire centraliser is formed from the tempered metal. Any other tempering process can be used to temper the metal. Suitable methods can be found in Metals Handbook Vol 1-3 1990-1991 published by ASM International.

The metal is preferably ductile metal and most preferably comprises ductile iron, although any metal that can be tempered will suffice. Castable metals are preferred.

Alloys can be used as the metal of the centraliser, and in particular, iron can be alloyed with Mo, Cu or Ni to enhance the hardness of the metal.

The iron is normally a cast iron with preferably 3.2-3.8% C most preferably 3.6% C and 2.2-2.8% Si most preferably 2.5%. Typically other alloying elements are added in very small quantities (<0.04%) which may include Mg, Mn, Cu, Ni, Mo, Sn, Sb, P, S, O, Cr, Ti, V, Al, As, Bi, B, Cd, Pb, Se, Te. Elements such as Be, Ca, Sr, Ba, Y, La, Ce may be added in lieu of Mg.

Grades 1-5 of ADI are preferred according to ASTM 897M-90.

The centraliser is typically cast into the desired shape with the annular body and blades, optionally shaped e.g. by filing or grinding, and then tempered, e.g. by austempering the whole centraliser. The tempering process can be extended in accordance with the ratio of ferrite:pearlite in the metal. Metals with a higher ferrite:pearlite ratio may need longer tempering process times. The centraliser is typically cast in a slightly different shape (e.g. with an oval-shaped annular body) to that of the final product (e.g. a cylindrical annular body) to allow for distortions occurring during the casting and tempering process. Typically the centraliser shrinks by e.g. 1-2% during casting and typically expands by e.g. 1-2% after heat treatment. Therefore the centraliser is typically cast to a different size than finally required.

The blades are preferably circumferentially distributed around the outer surface of the centraliser, and preferably each extend parallel to the bore of the centraliser. The blades are preferably disposed opposite one another on the centraliser body. There may be four, five or six such blades or some other number.

The method of invention is typically carried out by high temperature casting in a sand casting mould. The blades of the centraliser are typically formed by indentations in the mould and by protrusions on a blank set in the mould. The blade shapes are typically profiled to facilitate removal of the cast centraliser from the mould, and are typically profiled differently from one another. The centraliser is typically formed by two half-moulds adapted to engage one another so as to form the centraliser between the two half-moulds. Typically the join between the two moulds is aligned with a blade of the centraliser.

The tubular can be drillpipe, casing, liner, production tubing, coil tubing and may include slotted and predrilled and/or plugged tubing, screens and perforating strings etc for disposal in the reservoir payzone, in which case the centraliser would maintain the screen in the middle of the uncased borehole.

An embodiment of the invention will now be described by way of example and with reference to the accompanying drawings in which:-

Fig. 1 is a front elevation of a centraliser;

Fig. 2 is a side perspective view of the Fig. 1 centraliser;

Fig. 3 is a plan view of the Fig. 1 centraliser; and,

Fig. 4 is a perspective exploded view of a sand cast used to manufacture the Fig. 1 centraliser.

A casing centraliser 10 comprises a unitary moulded cylindrical body 12, and an array of six equiangularly-spaced blades 14 integrally formed with the body 12. A cylindrical bore 16 extends axially through the body 12, and has a substantially uniform diameter dimensioned to be a clearance fit around the well bore casing, or other tubular to which the centraliser is applied.

Each of the blades 14 not only extends between longitudinally opposite ends of the body 12, but also extends circumferentially around the periphery of the centraliser 10. The skewing of the blades 14 ensures that their respective outer edges 18 collectively provide a generally uniform well bore-contacting surface around the circumference of the centraliser 10.

Each of the blades 14 has a respective radially inner root 19 integral with the body 12. In each of the blades 14, the root 19 has a greater circumferential

width than the outer edge 18, i.e. the cross-section of each blade 14 tapers towards the well bore-contacting periphery of the centraliser 10. The individual and collective shapes of the blades 14, and of the longitudinal fluid flow passages defined between adjacent pairs of the blades 14, gives the centraliser 10 improved flow characteristics and minimises the build-up of trapped solids during use of the centraliser 10. The tapered cross-section of the blades also eases removal of the centraliser from the cast during manufacture.

Longitudinally opposite ends of the blades 14 and of the body 12 are chamfered to assist in movement of the centraliser 10 up/down a well bore.

The blades 14 of the centraliser 10 keep the tubular centralised within the borehole, and bear against the wall of the borehole to reduce friction should the tubular be moved.

It is preferred that the entire centraliser 10 be fabricated as a one-piece article (although the blades 14 could be separately formed and subsequently attached to the body 12 by any suitable means). The centraliser 10 is typically formed from ductile iron and moulded in a sand cast 20.
The sand cast 20 is used to cast mould the centaliser 10. The sand cast 20 is made up from two parts 21a, 21b with semi-circular cross section.

An indent 22 to correspond to the outer face of the centraliser 10 is first cut out from the sand 25 in each part 21a, 21b of the cast 20. Further indentations are then cut into the indent 22 to form outer faces of blades 14 in the cast centraliser. An inner core 23 is secured in support holes 24 and is suspended in the indent 22 without touching the walls thereof so as to displace metal from an axial bore of the centraliser 10 and provide on its outer surface a blank for the inner surface of the centraliser 10. The core 23 is therefore located in the mould where the bore 16 of the centraliser will be in the finished article. The upper cast 21b is joined to the lower cast 21a before the metal is poured so that the complete shape cut out of the sand 25 is that of the centraliser 10. Normally the join between the upper 21b and lower 21a parts of the cast along or close to a blade 14.

As the material will shrink on cooling and its dimensions will be altered during heat treatment, the shape of the indent 22 can first be precisely determined from shrinkage calculations and by measurements of previous casts. The material being moulded will also affect the shrinkage characteristics. Typically the centraliser will expand during the tempering process. As the shrinkage after casting and particularly the expansion after tempering, is non-uniform a specifically calculated indent 22 is used to make the centraliser 10.

The sides of the indent 22 curve inwards to allow the mould to be removed from the centraliser after the material has solidified. The blades 14 are tapered to ease the removal of the centraliser 10 from the mould.

Molten ductile iron is poured through the hole 26 and into the indent 22. The iron is allowed to cool and so the centraliser 10 is formed. The sand cast 20 can then be removed from the centraliser 10. The tapered sides of the indent 22 and tapered blades 14 allow the cast to be removed relatively easily.

The iron is normally a cast iron with between 3.2-3.8% C most preferably 3.6% C and 2.2-2.8% Si most preferably 2.5%. C and Si to an extent, encourage similar properties in the material and so the total amount of %C and (1/3)%Si can be considered as a *carbon equivalent(CE)*. The total CE ranges are typically around 4.3% for thick sections (over 2″), to 4.6% for thin sections, (0.1″-0.5″).

Optionally other alloying elements are added in very small quantities which may include Mn(typically 0.35-0.60%), Mg ((%S x 0.76) + 0.025% +/- 0.005%), Sn (0.02 +/-0.003%), Sb (0.002% +/- 0.0003%), P (0.04%), S (0.02%), O (50ppm), Cr (0.10%), Ti(0.040%), V (0.10%), Al (0.050%), As (0.020%), Bi (0.002%), B (0.002%), Cd (0.005%), Pb (0.002%), Se (0.030%), Te (0.020%).

To increase hardenability for a heavier section (i.e. greater than 19mm), Cu(up to 0.8%), Ni(up to 2%) and

Mo(up to 0.3%) may be added. Increased hardenability prevents the formation of pearlite during quenching. Mg is added to encourage nodulisation. Elements such as Be, Ca, Sr, Ba, Y, La, Ce may be added in lieu of or in addition to Mg. The total weight of nodulising elements is not normally more than 0.06%.

The castings should be free of non-metallic inclusions, carbides, shrink and dross. Proper purchasing, storage and use of charge material will minimise the unwanted occurrence of carbides and gas defects. Proper moulding control will minimise surface defects and other sub-surface discontinuities. The casting should be properly gated and poured using consistent and effective treatment and inoculation techniques to ensure shrink free castings. Preferably the nodule count will be at least $100/mm^2$ and the nodularity at least 85%.

After casting the centraliser 10 is tempered by a heat treatment to produce a stronger, harder material. The ductile iron used to produce the centraliser 10, normally contains pearlite and ferrite which are irregular in shape and vary substantially in size. This reduces hardness and strength. The centraliser is heated to the austenite phase i.e. between 815°C and 955°C depending on the precise concentration of the alloys. The centraliser is held for 1-4 hours in the austenite phase, the precise time required depends on the size of the centraliser and the amount of ferrite

in the metal; a higher concentration of ferrite may require more time at these elevated temperatures. When the austenite is saturated with carbon the centraliser is then austemperised. To achieve this the metal is quenched in molten salt at 240°C - 400°C. The rate of cooling should be sufficient to avoid the formation of ferrite or pearlite. The metal is held in the salt for 1-4h to allow the austenite to change to ausferrite. The molten salt is normally an equimolar mixture of potassium nitrate/sodium nitrite although other salts may be used.

The net effect of the heat treatment is to cause the ferrite and pearlite phases to be converted into ausferrite. Ausferrite is a stabilised carbon enriched austenite and acicular ferrite non-equilibrium phase.

This material is twice as strong as conventional ductile iron. Another advantage is that this material is less dense than conventional steel and so is up to 10% lighter. A further advantage is the increased hardenability compared with steel. The cost of manufacturing in this way is also reduced.

Alternatively, other heat treatments may be used to adapt the microstructure and phase composition of the metal 22.

For example to increase ductility the material may be heated up to 700-730°C. After 1-4 hours the material is quenched in molten salt. This reduces the amount of

coarse pearlite and increases the amount of spheriodite in the structure.

A further alternative may be to anneal the steel. The centraliser is again heated into the austenite phase but is then allowed to cool gradually. This produces a microstructure with small and uniform grains.

Modifications and improvements can be incorporated without departing from the scope of the invention.

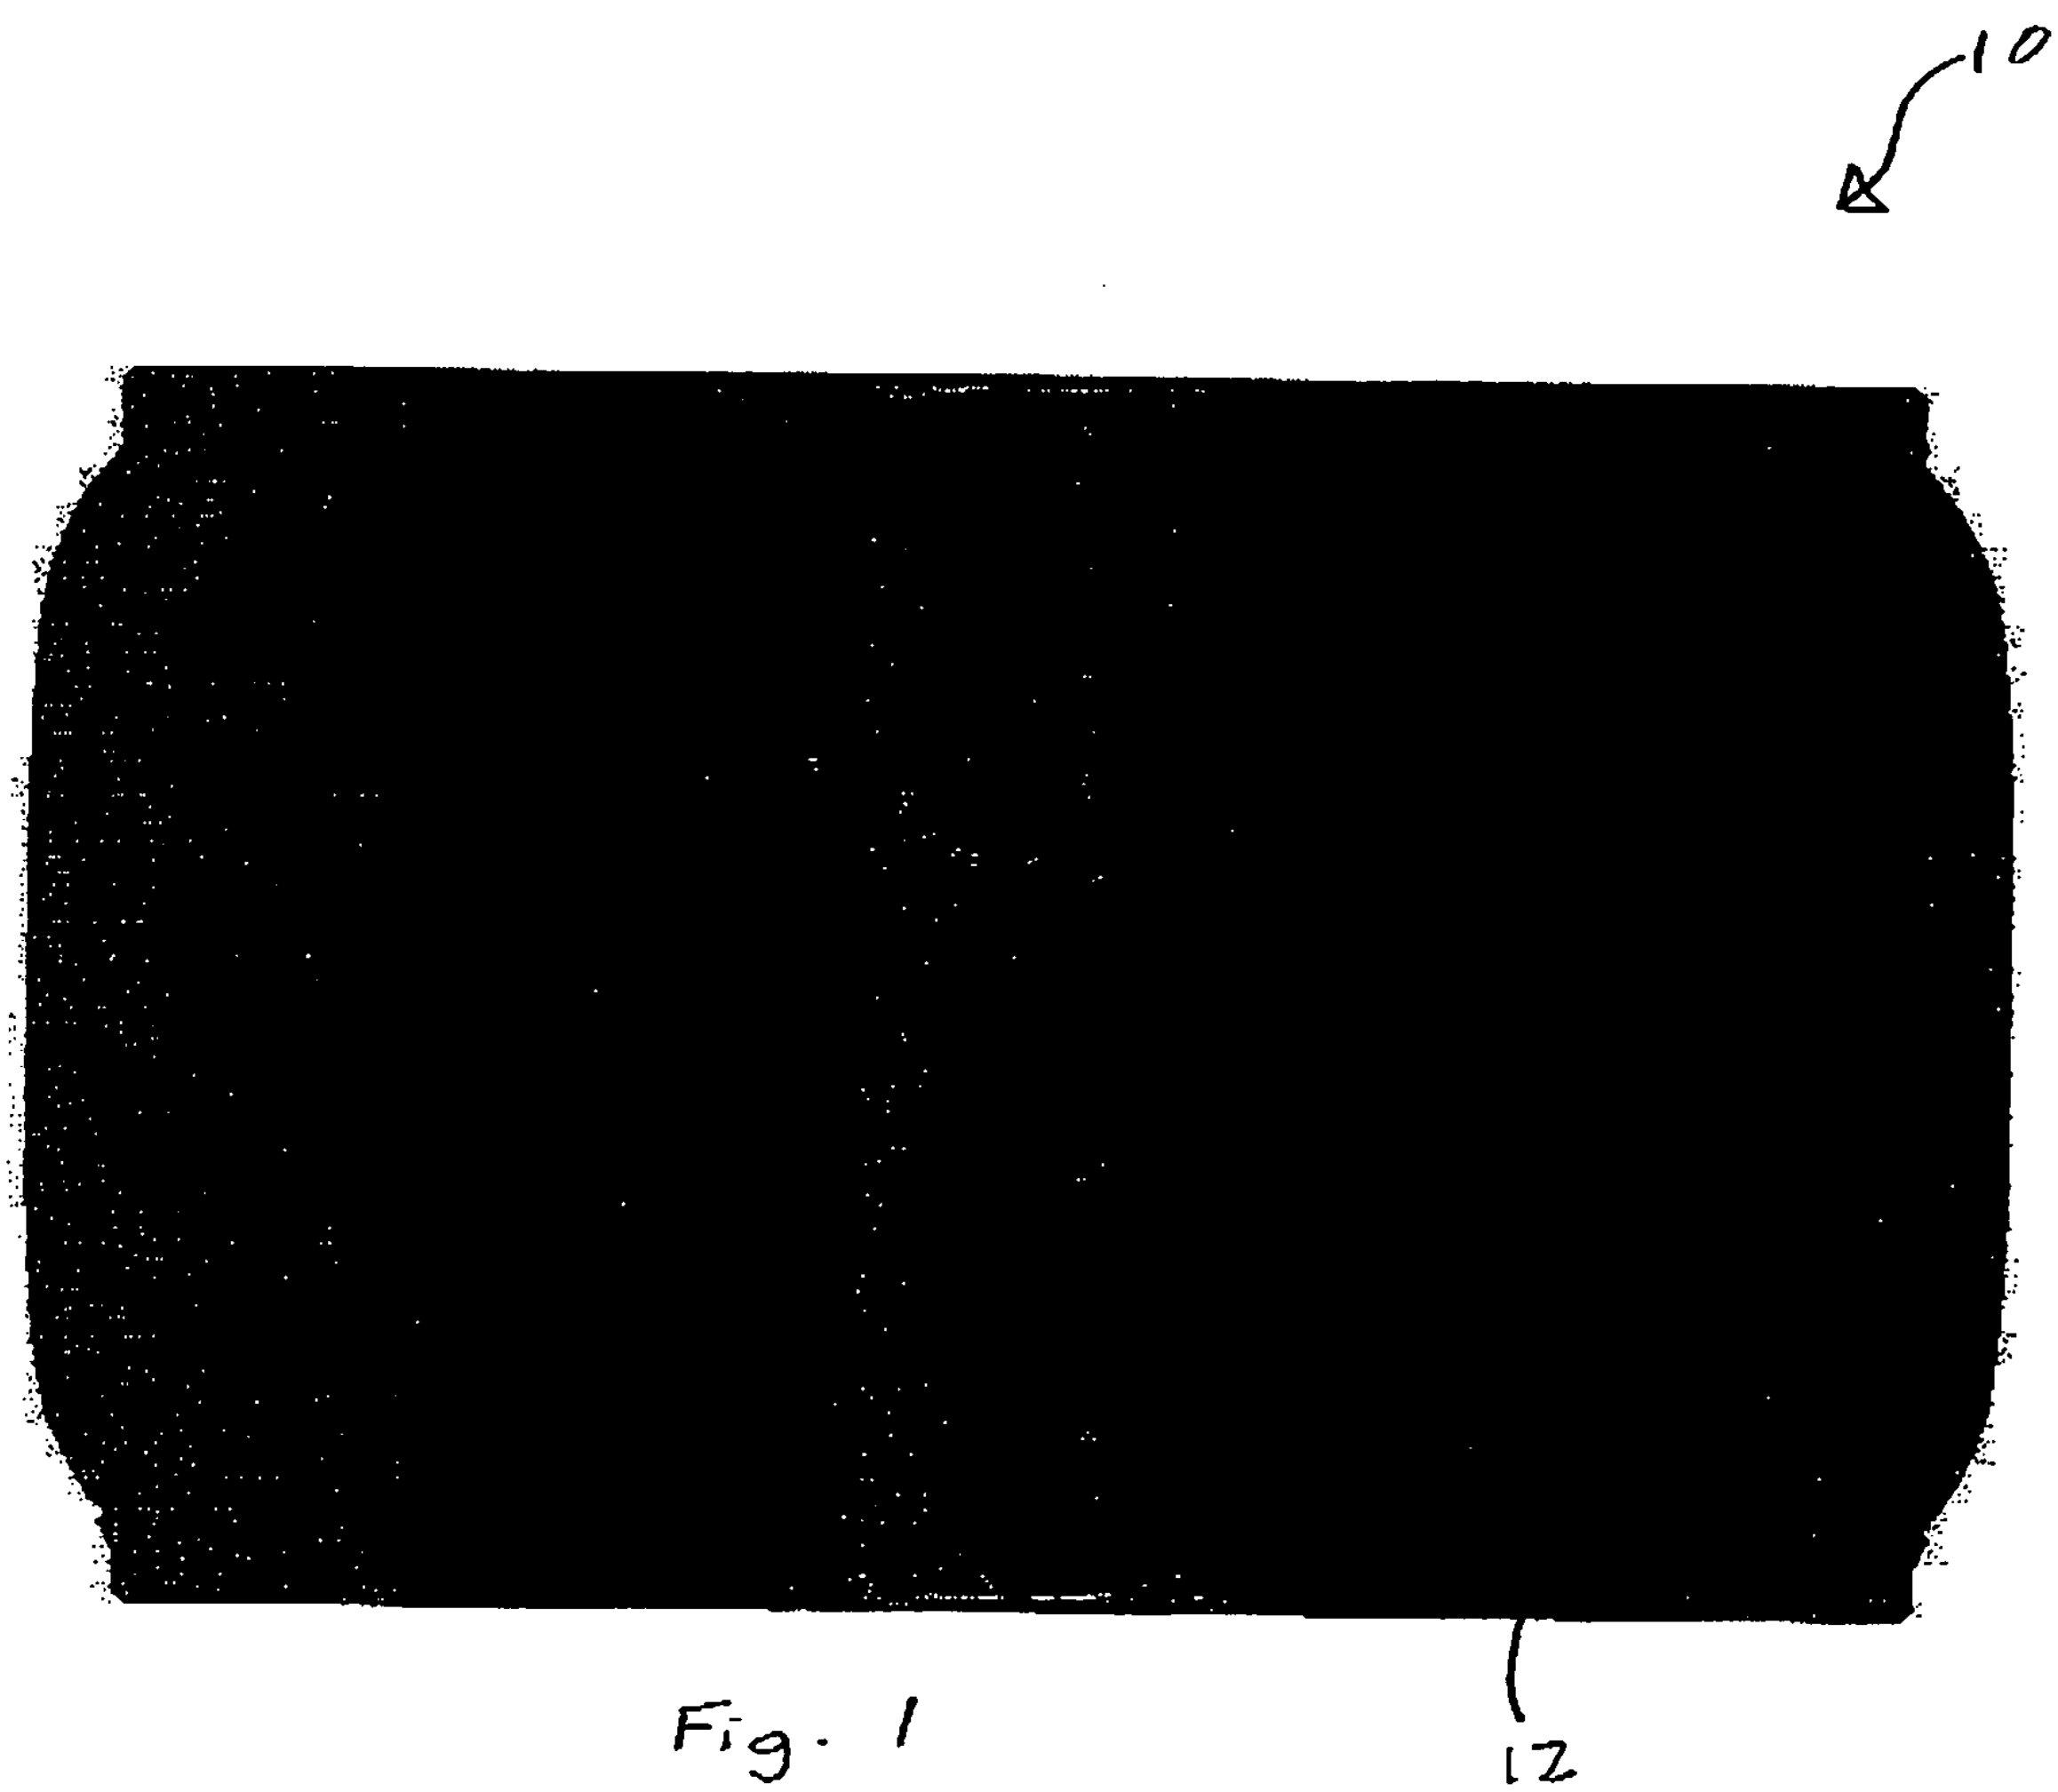

Fig. 1

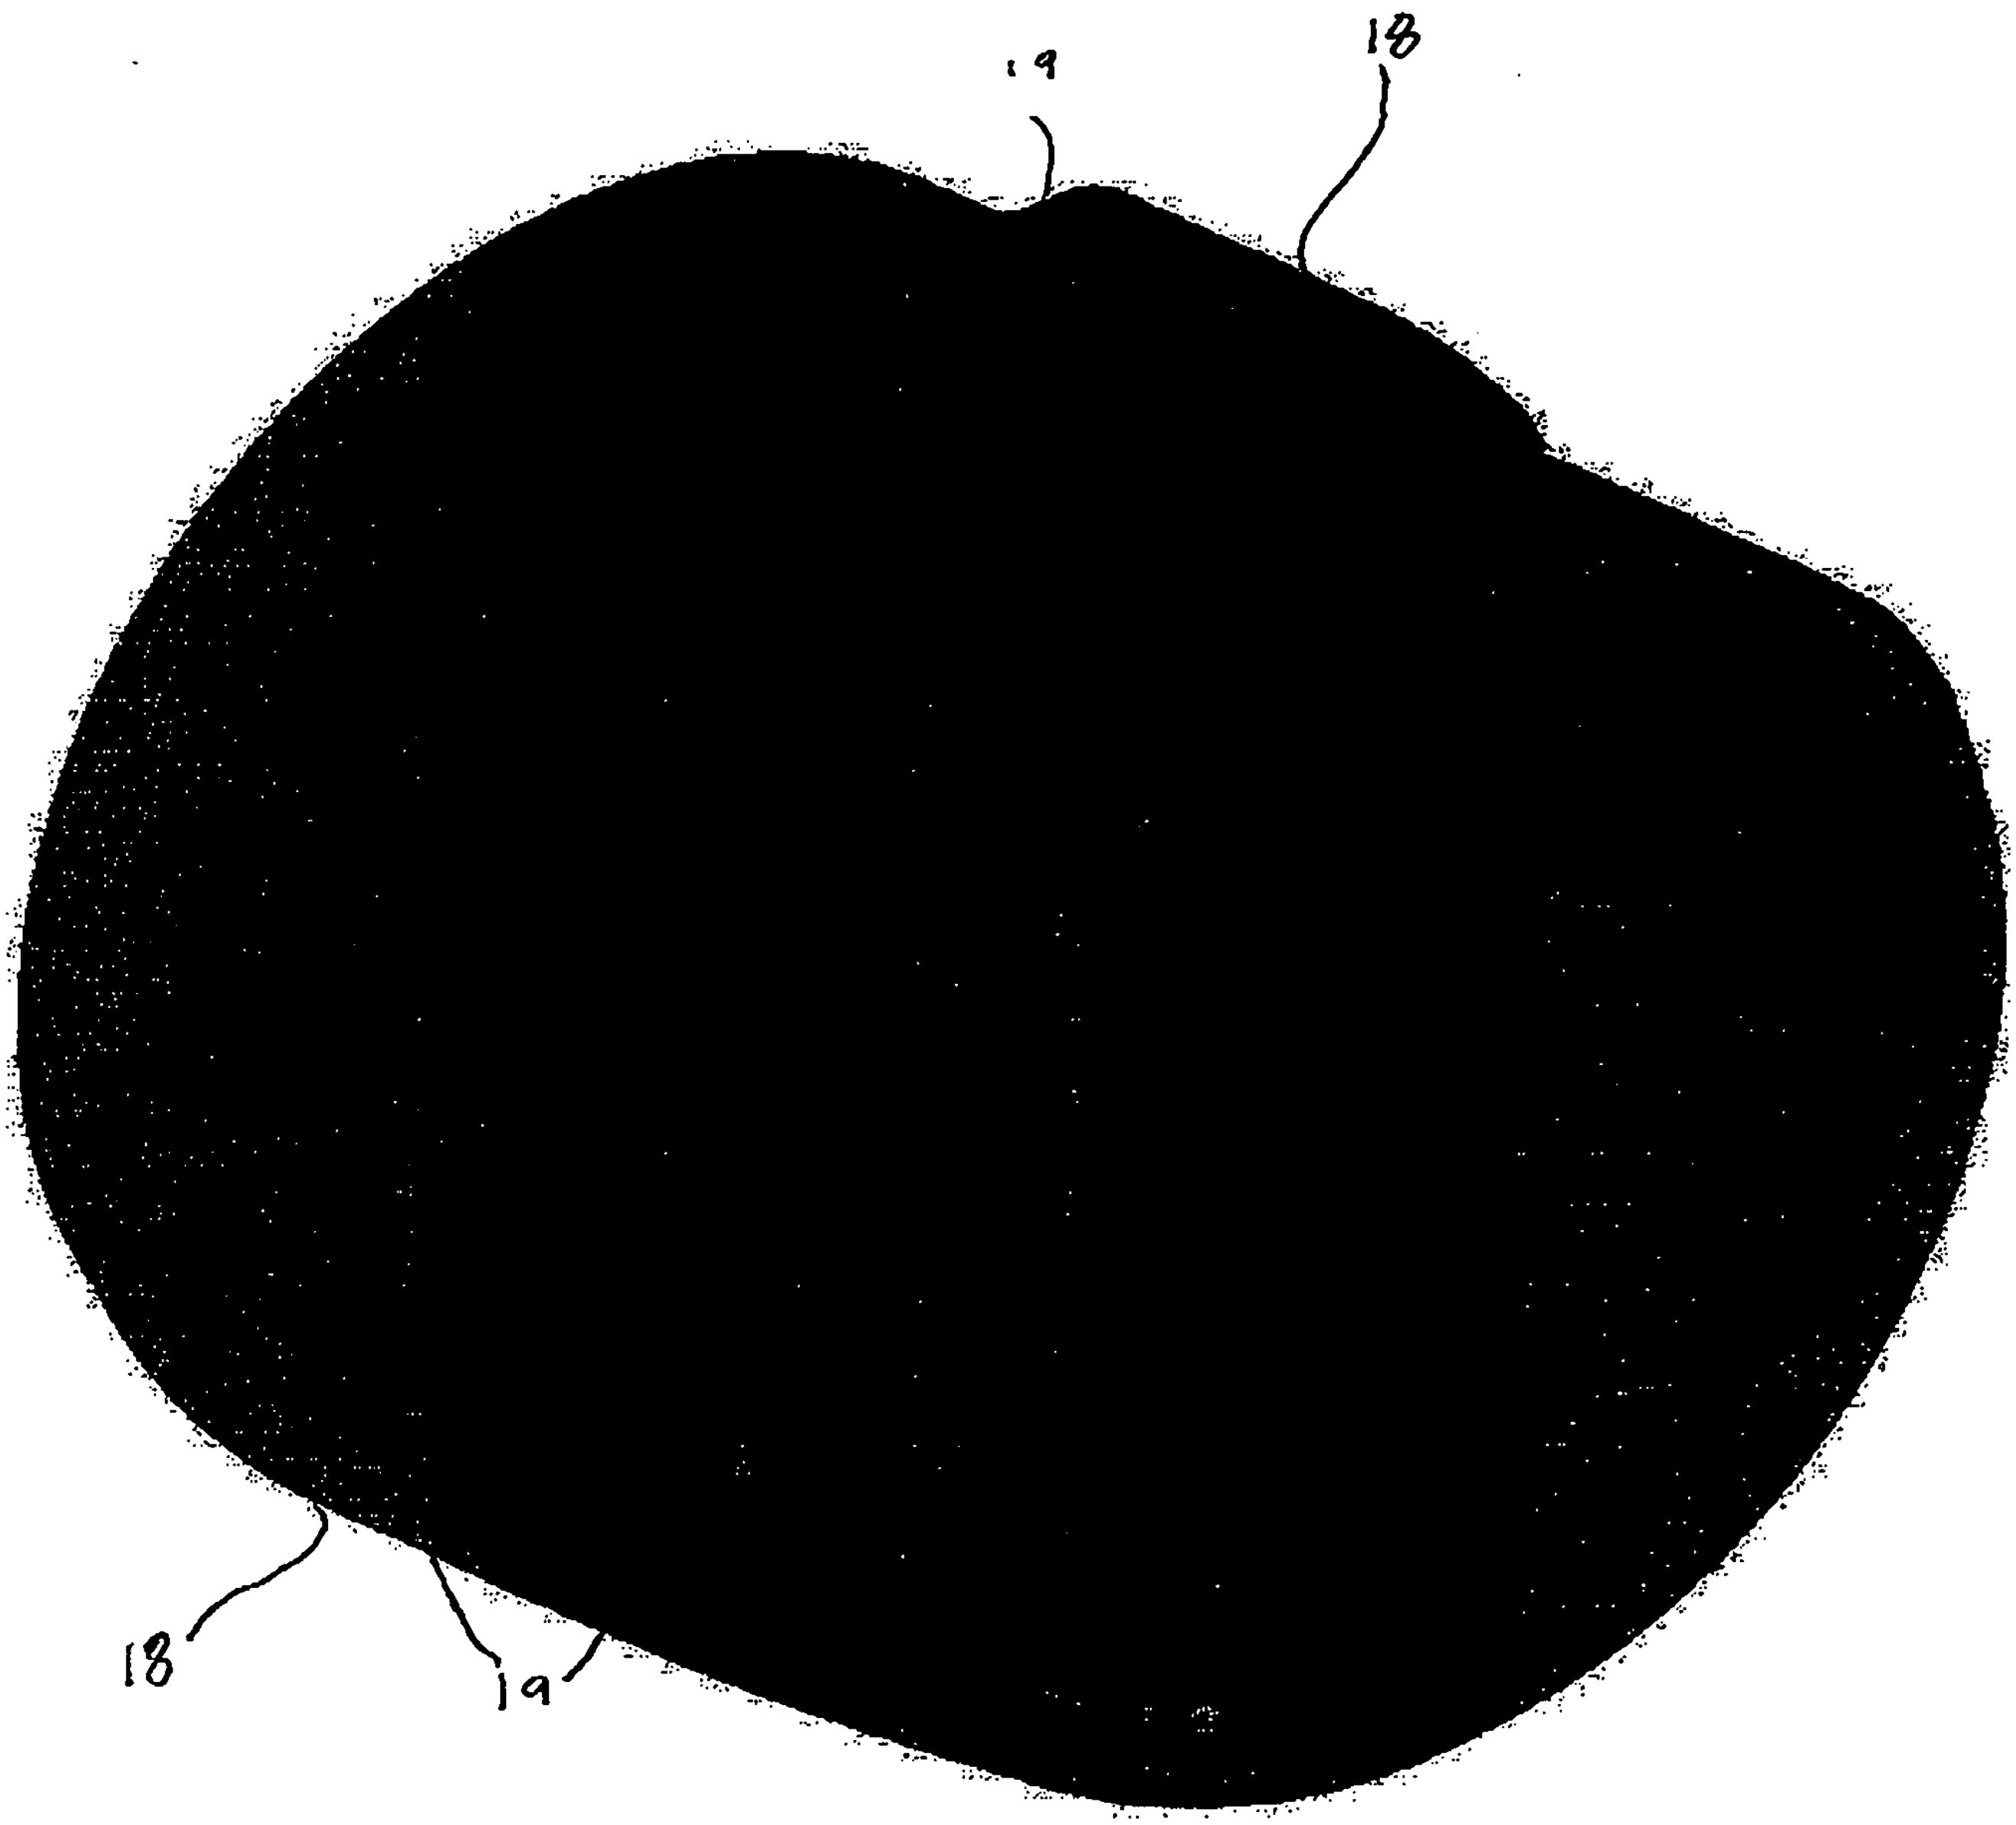

Fig. 2

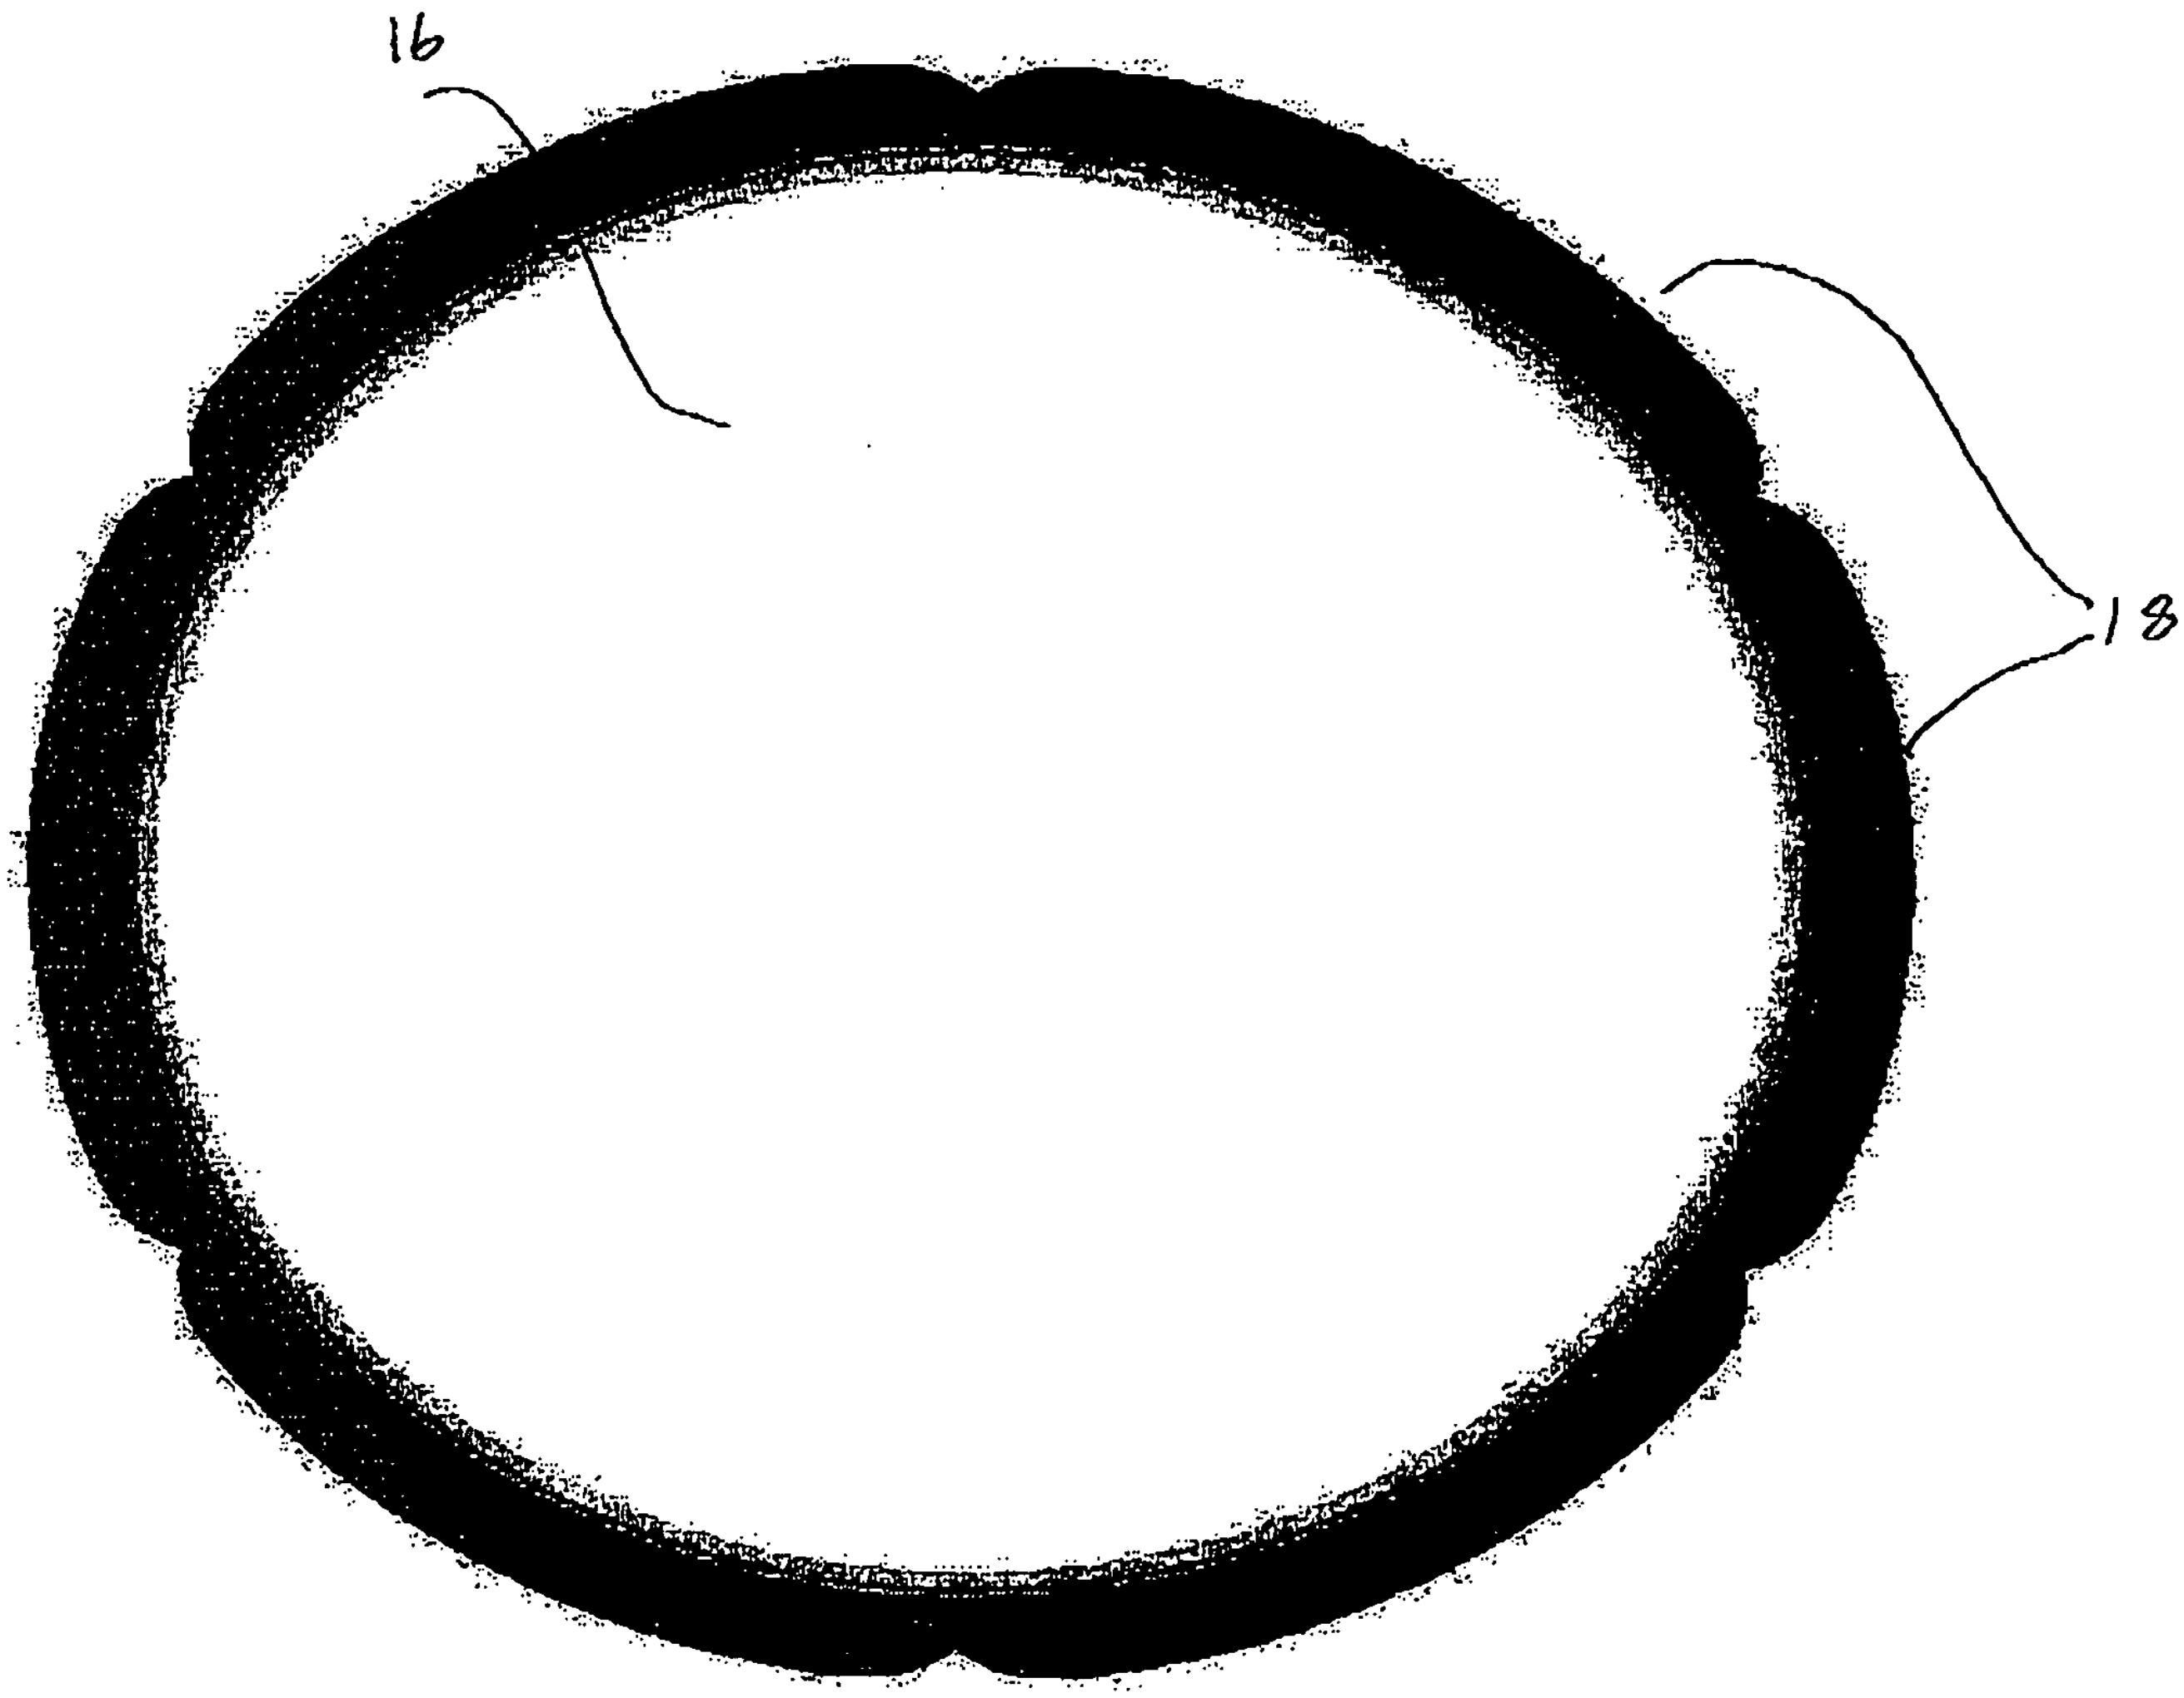

Fig. 3

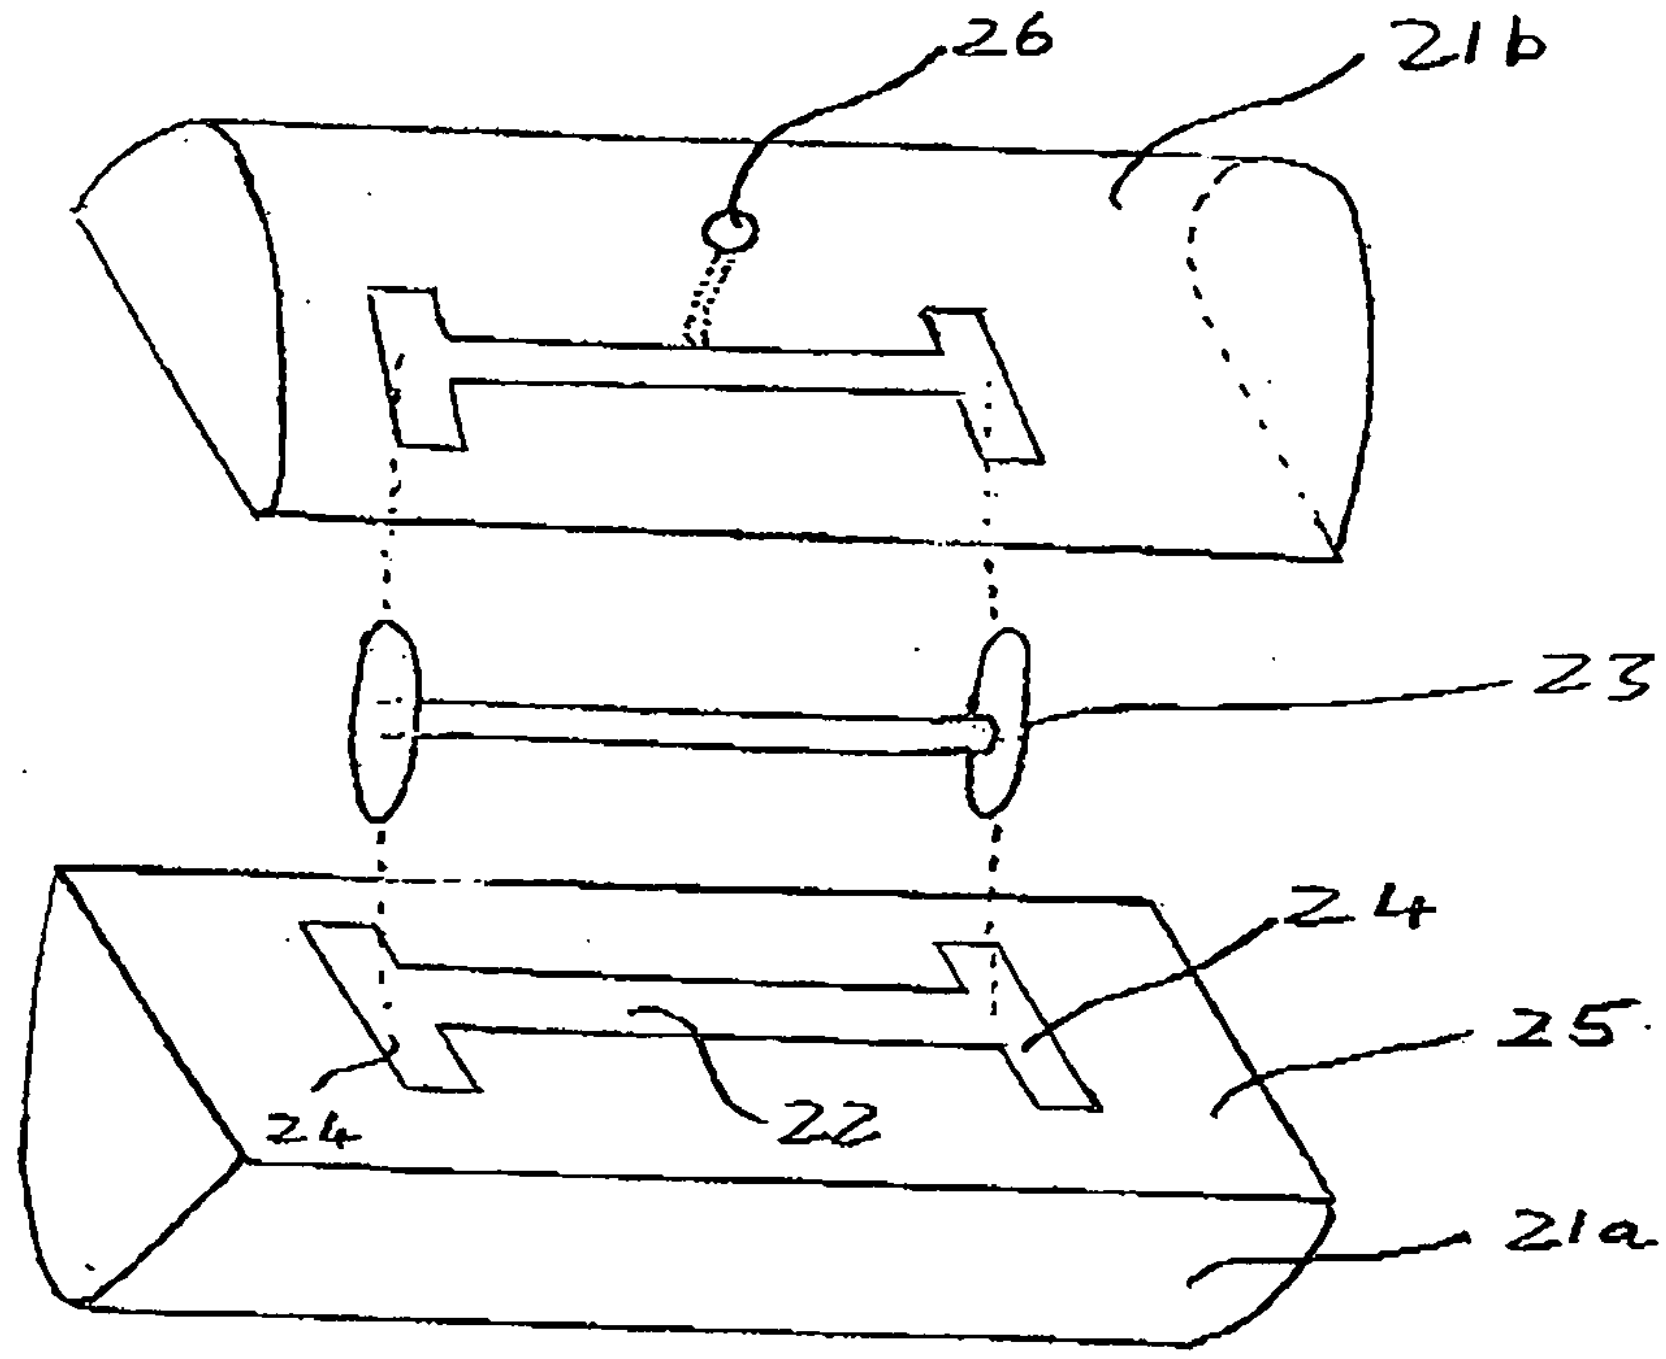

Fig. 4